

Socket outlet


Single socket outlet with residual current device

Tyyppi: 3120EUC-916

Tuotekoodi: 2CCG001361R0001

GTIN: 7612271518301

Shuttered. DP cut off (P,N) Without PE monitoring. With connecting conductor and protection of downstream socket outlets. Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20) μ s. With fixing claws. Rated frequency: 45-60 Hz.

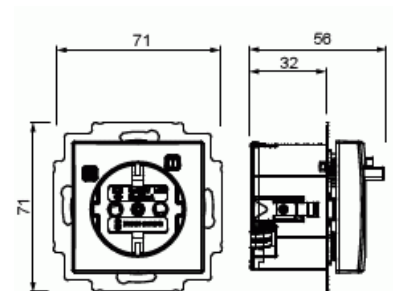

Tekniset tiedot

Sähkösuureet

Nominal current:	16 A
Nominal voltage:	250 V

Luokitus

Suitable for degree of protection (IP):	IP21
---	------

Pakkaus

Paketti:	1/1
Yksikkö:	kpl

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000125
Number of active pins (round):	2
With signal lamp:	Ei
Number of units:	1
Number of phases:	1
Imprint/indication:	None
Connection type:	Push-in clamp
With hinged lid:	Ei
With enhanced contact protection:	Ei
Label space/information surface:	Ei
Colour:	White
RAL-number (similar):	9003
Metallic colour:	Ei
Transparent:	Ei
Lockable:	Ei
Eject-mechanism:	Ei
Insulated mounting:	Ei
With function lighting:	Ei
With orientation lighting:	Ei
Over voltage protection:	Ei
Fault current protection:	Ei
With miniature fuse:	Ei
Special power supply:	No special power supply
Mounting method:	Flush mounted (plaster)
Type of fastening:	Mounting with claw and screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Glossy
Anti-bacterial treatment:	Ei
With loop through function:	Ei
With on/off switch:	Ei

Tuotekortti

Single socket outlet with residual current device



Rotated central insert:	Ei
Frequency:	50...60 Hz
Rated fault current:	30 mA
Device width:	71 mm
Device height:	71 mm
Device depth:	56 mm