

Socket outlet

Residual current device, 1-gang


Tyyppi: 3150UC-916.1

Tuotekoodi: 2CCG001362R0001

GTIN: 7612271518318

IP21

Protection of downstream consumers. Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20) μ s. Without claw fixation. Rated frequency: 45-60 Hz.

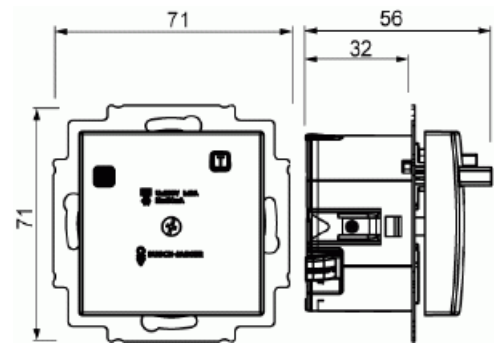

Tekniset tiedot

Pakkaus

Paketti:	1/1
Yksikkö:	kpl

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000003
Rated current:	16 A
Rated fault current:	0.03 A
Mounting method:	Other
Degree of protection (IP):	IP21
RAL-number (similar):	9003