


BasicLINE standard

BasicLINE standard, white

Tyyppi: 6814U

Tuotekoodi: 2CKA006800A2518

GTIN: 4011395148044

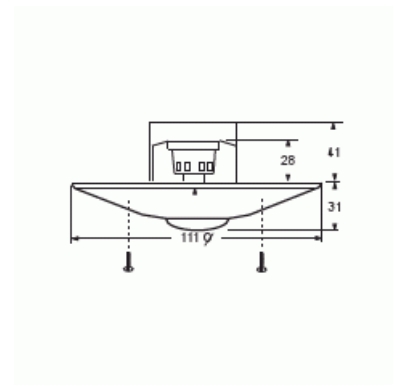

Tekniset tiedot

Luokitus

Enclosure class:	IP40
------------------	------

Dimensions

Dimensions:	111x111x59 mm
-------------	---------------

Thermal conditions

Operating temperature:	0 ... 45 °C
------------------------	-------------

Electronics

Detection area:	360°
-----------------	------

Pakkaus

Paketti:	1/24
Yksikkö:	kpl

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000133
Model:	Presence detector
Sensor type:	Passive infrared
With DALI interface:	Ei
Constant light control:	Ei
HVAC-control:	Ei
Forced switch on:	Ei
Forced switch off:	Ei
Animal zone:	Ei
Creep-under protection:	Kyllä
Networkable:	Ei
Optimum mounting height:	2 m
Staircase monitoring:	Kyllä
Bridging switch:	Ei
Suitable for wireless transmission:	Ei
Remote operation:	Ei
With remote control:	Ei
Response value sensitivity adjustable:	Ei
Response value luminosity adjustable:	Kyllä
With signal unit:	Ei
Teach-function for response value luminosity:	Ei
Dim function with dimmer basic element:	Ei
Mounting method:	Flush mounted (plaster)
Suitable for ceiling mounting:	Kyllä
Suitable for wall mounting:	Ei
Material:	Plastic
Material quality:	Thermoplastic

Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Matt
Anti-bacterial treatment:	Ei
Colour:	White
RAL-number (similar):	9010
Transparent:	Ei
Degree of protection (IP):	IP40
Voltage type:	AC
Frequency:	50...60 Hz
Nominal voltage:	230 V
Min. switch-on time:	5 s
Max. duty cycle:	30 min
Detection angle horizontal:	30...360 °
Response value luminosity:	10...2000 lx
Substation input:	Kyllä
With alarm function:	Ei
Width:	135 mm
Height:	30 mm
Depth:	25 mm
Built-in depth:	41 mm
Built-in diameter:	65 mm
Min. depth of built-in installation box:	41 mm
Compatible with Apple HomeKit:	Ei
Compatible with Google Assistant:	Ei
Compatible with Amazon Alexa:	Ei
IFTTT support available:	Ei