


BasicLINE hallway

BasicLINE hallway, white

Tyyppi: 6818U-500

Tuotekoodi: 2CKA006800A2519

GTIN: 4011395148051

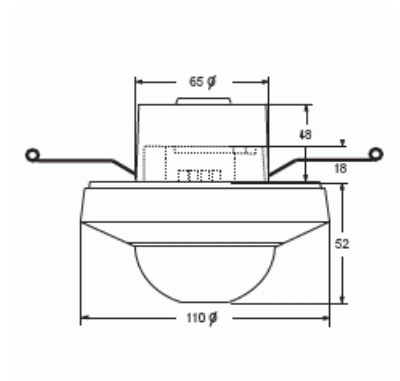

Tekniset tiedot

Sähkösuureet

Rated frequency: 50 Hz

Luokitus

Enclosure class: IP40

Dimensions

Dimensions: 110x110x70 mm

Electronics

Detection area: 360 °

Pakkaus

Paketti:	1/18
Yksikkö:	kpl

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000133
Model:	Presence detector
Sensor type:	Passive infrared
With DALI interface:	Ei
Constant light control:	Ei
HVAC-control:	Ei
Forced switch on:	Kyllä
Forced switch off:	Kyllä
Animal zone:	Ei
Creep-under protection:	Kyllä
Networkable:	Ei
Optimum mounting height:	2 m
Staircase monitoring:	Kyllä
Bridging switch:	Ei
Suitable for wireless transmission:	Ei
Remote operation:	Kyllä
With remote control:	Ei
Response value sensitivity adjustable:	Ei
Response value luminosity adjustable:	Kyllä
With signal unit:	Ei
Teach-function for response value luminosity:	Ei
Dim function with dimmer basic element:	Ei
Mounting method:	Flush mounted (plaster)
Suitable for ceiling mounting:	Kyllä
Suitable for wall mounting:	Ei
Material:	Plastic
Material quality:	Thermoplastic

Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Matt
Anti-bacterial treatment:	Ei
Colour:	White
RAL-number (similar):	9010
Transparent:	Ei
Degree of protection (IP):	IP40
Voltage type:	AC
Frequency:	50...60 Hz
Nominal voltage:	230 V
Min. switch-on time:	10 s
Max. duty cycle:	30 min
Detection angle horizontal:	30...360 °
Response value luminosity:	10...2000 lx
Substation input:	Kyllä
With alarm function:	Ei
Width:	110 mm
Height:	110 mm
Depth:	100 mm
Built-in depth:	48 mm
Built-in diameter:	65 mm
Min. depth of built-in installation box:	48 mm
Compatible with Apple HomeKit:	Ei
Compatible with Google Assistant:	Ei
Compatible with Amazon Alexa:	Ei
IFTTT support available:	Ei