


# Watchdog

## Watchdog 220 MasterLINE, white

**Tyyppi:** 6847/11AGM-204-500

**Tuotekoodi:** 2CKA006800A2524

**GTIN:** 4011395150559

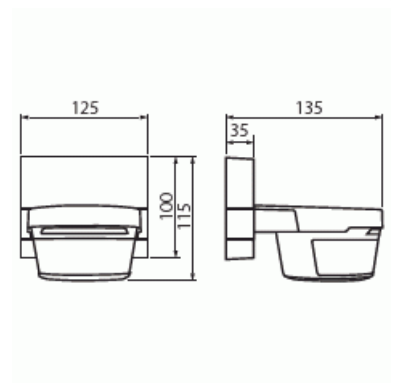

Electronic movement detector for detecting thermal motion.  
Remote operation via IR remote control 6841-101.  
Remote configurable via IR service remote control 6842-101.  
With display for detection and operation mode.  
With ground and rear-field detection.  
With high-quality lens for optimum detection.  
Detection sensitivity adjustable via IR remote control.  
Surveillance density: 84 sectors with 336 switching segments.  
With integrated dismantling protection.  
All functions controlled by microprocessor.  
Continuous light (4 hours), light deactivation (4 hours) and presence simulation can be activated via IR remote control.  
Reading in the current brightness value as switching threshold via remote control.  
With automatic range stabilization.  
With automatic interference suppression.  
With automatic dazzle-proofing.  
With brightness-independent test mode for evaluating the detection zone.  
Individual adjustment of detection range via enclosed protective foil which can be cut to size.  
Additional possibility for switch-on via normally open push-button switch.  
Switch-off delay: 10 sec to 30 min or short-time pulse 1 sec adjustable.  
Rated voltage: 230 V~, +10% / -10%  
Rated frequency: 50 Hz - 60 Hz  
Power dissipation: 1 W  
Outputs: 1 Normally open contact, potential-bound  
Suitable for: ohmic, capacitive and inductive loads  
Rated current: 16 AX, cos  $\phi$ 0.6

Rated power: 3680 W/VA  
Protection class (Device): IP 55  
Temperature range (Device): -25 °C - 55 °C  
Detection range: frontal: 16 m lateral: 16 m  
Brightness limit value: 0.5 Lux - 300 Lux - , Daytime operation  
Detection angle: 220 °  
Dimensions: (L x W x D): 115 mm x 125 mm x 141 mm  
Mounting height: - 2.5 m  
In combination with a relay/contactor, an RC suppressor 6899 has to be used.

## Tekniset tiedot

### Sähkösuureet

Rated voltage:	230 V
Power ratio (cos φ):	0.6
Switching current:	≤ 16 AX

### Luokitus

Enclosure class:	IP55
------------------	------

### Dimensions

Dimensions:	115x125x141 mm
Weight:	550 g

### Thermal conditions

Operating temperature:	-25 ... 55 °C
------------------------	---------------

### Colors

Colour:	White
---------	-------

**Electronics**

Operating frequency:	50 ... 60 Hz
Detection area:	220°, eteen 16 m, sivuille 16 m
Switching time:	10 s-30 min

**Pakkaus**

Paketti:	1/10
Yksikkö:	kpl

**ETIM Data**

ETIM Version:	ETIM-9.0
ETIM Class:	EC000133
Model:	Movement sensor
Sensor type:	Passive infrared
With DALI interface:	Ei
Constant light control:	Ei
HVAC-control:	Ei
Forced switch on:	Kyllä
Forced switch off:	Kyllä
Animal zone:	Ei
Creep-under protection:	Kyllä
Networkable:	Ei
Optimum mounting height:	2.5 m
Staircase monitoring:	Kyllä
Bridging switch:	Ei
Max. presence range:	3216.98816 m <sup>2</sup>
Diameter detection range on floor:	32 m
Suitable for wireless transmission:	Ei
Remote operation:	Kyllä
With remote control:	Ei
Response value sensitivity adjustable:	Kyllä
Response value luminosity adjustable:	Kyllä
With signal unit:	Ei

Teach-function for response value luminosity:	Ei
Dim function with dimmer basic element:	Ei
Mounting method:	Surface mounted (plaster)
Suitable for ceiling mounting:	Ei
Suitable for wall mounting:	Kyllä
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Matt
Anti-bacterial treatment:	Ei
Colour:	White
RAL-number (similar):	9010
Transparent:	Ei
Degree of protection (IP):	IP55
Voltage type:	AC
Frequency:	50...60 Hz
Nominal voltage:	230 V
Min. switch-on time:	10 s
Max. duty cycle:	30 min
Detection angle horizontal:	8...220 °
Pivoting range sensor, horizontal:	-30...30 °
Pivoting range sensor, vertical:	-10...10 °
Response value luminosity:	0...1000 lx
Max. switching power:	3680 W
Substation input:	Ei
With alarm function:	Ei
Width:	228 mm
Height:	30 mm
Depth:	20 mm
Compatible with Apple HomeKit:	Ei
Compatible with Google Assistant:	Ei
Compatible with Amazon Alexa:	Ei

# Tuotekortti

Watchdog 220 MasterLINE, white



IFTTT support available:

Ei