


Socket outlet


Socket outlet, Jussi IP55, 2-gang Schuko, shuttered, screwless terminals, branching terminals

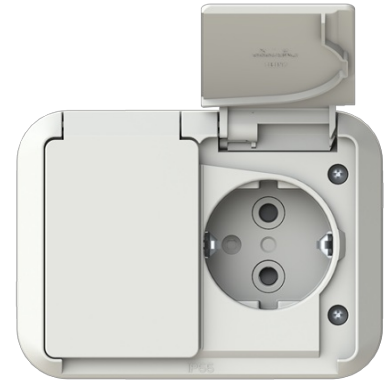

Tyyppi: 402ESW

Tuotekoodi: 2TKA000996G1

GTIN: 6418677334580



There are terminals for each contact of the socket outlet for max 4 rigid wires. 1 potential free X-terminal with screw connector. IP55 when lids are closed and installed horizontally (lids opening upwards). The lids are kept closed with a return spring when socket outlet is not in use.

Tekniset tiedot

Sähkösuureet

Nominal current:	16 A
Nominal voltage:	250 V

Luokitus

Suitable for degree of protection (IP):	IP55
---	------

Pakkaus

Paketti:	10/100
Yksikkö:	kpl

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000125
Number of active pins (round):	2
With signal lamp:	Ei
Number of units:	2
Number of phases:	1
Imprint/indication:	None
Connection type:	Push-in clamp
With hinged lid:	Ei
With enhanced contact protection:	Kyllä
Label space/information surface:	Ei
Colour:	White
RAL-number (similar):	9010
Metallic colour:	Ei
Transparent:	Ei
Lockable:	Ei
Eject-mechanism:	Ei
Insulated mounting:	Ei
With function lighting:	Ei
With orientation lighting:	Ei
Over voltage protection:	Ei
Fault current protection:	Ei
With miniature fuse:	Ei
Special power supply:	No special power supply
Mounting method:	Surface mounted (plaster)
Type of fastening:	Mounting with screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Matt
Anti-bacterial treatment:	Ei
With loop through function:	Ei

Tuotekortti

Socket outlet, Jussi IP55, 2-gang Schuko, shuttered, screwless terminals, branching terminals



With on/off switch:	Ei
Rotated central insert:	Ei
Frequency:	50 Hz
Device width:	80 mm
Device height:	50 mm
Device depth:	109 mm