

---

# Table Panel, white

Table Panel for office signal system,  
Impressivo, white

---


**Tyyppi:** FIP2000-84

**Tuotekoodi:** 2TKA002148G1

**GTIN:** 6418677334474



The Table Panel can be used for controlling the signal lights of Door Panel FIO2000. It also includes a freely adaptable Push Button and Switch, which can be integrated into an existing emergency or assistant call system using the Adapter Relay FIR2000. 2 meters connecting wire. Operating voltage: 15 - 28 V ac. Current consumption 65 mA (max).

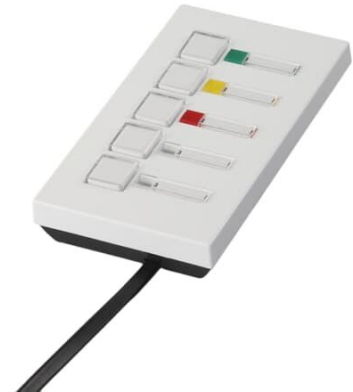

## Tekniset tiedot

### Sähkösuureet

Nominal voltage:	24 V
Operating voltage:	15 - 28 V ac
Current consumption:	65 mA ac (max 28 V ac syötöllä)

### Luokitus

Suitable for degree of protection (IP):	IP20
---	------

### Dimensions

Dimensions:	147x26x82 mm
Weight:	240 g

## Thermal conditions

Operating temperature:	5 ... 40 °C
Storage temperature:	-40 ... 70 °C

## Signal products

Connector:	RJ 6 napainen
Length of connecting wire:	2 m

## Pakkaus

Paketti:	1/10
Yksikkö:	kpl

## ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000064
Assembly arrangement:	Complete device
With light source:	Kyllä
Lamp type:	LED not exchangeable
With flashlight:	Ei
With fixed symbol/imprint:	Ei
With exchangeable symbol:	Ei
Application as button:	Normally open contact with feedback contacts
Mounting method:	Built-in installation
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Kyllä
Surface protection:	Untreated
Surface finishing:	Glossy
Colour:	White
RAL-number (similar):	9016
Transparent:	Ei
Device width:	82 mm

# Tuotekortti

Table Panel for office signal system, Impressivo, white



---

Device height:	26 mm
Device depth:	147 mm

---