Socket outlet

Residual current device, 1-gang

Type: 3150UC-916.1

Product ID: 2CCG001362R0001

GTIN: 7612271518318

IP21

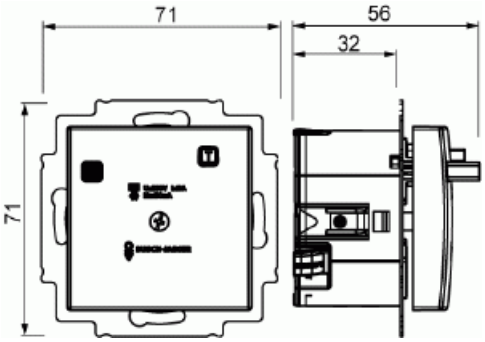

Protection of downstream consumers. Rated actuating current: 30 mA. Release time: ≤ 30 ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20) µs. Without claw fixation. Rated frequency: 45-60 Hz.

Technical specification

Packing

Package:	1/1
Unit:	PCS

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000003
Rated current:	16 A
Rated fault current:	0.03 A
Mounting method:	Other
Degree of protection (IP):	IP21
RAL-number (similar):	9003

© ABB 2025

Business ID 0763403-0
www.installationmaterials.com

Customer service
puh. +358 10 222 1999
contact.center@fi.abb.com

ABB Exchange
+358 10 22 11