

Product Card

Socket outlet, Schuko, 1-gang, shuttered, screwless terminals, LED light, black matt



Socket outlet

Socket outlet, Schuko, 1-gang, shuttered, screwless terminals, LED light, black matt


Type: 20 EUCBLI-885

Product ID: 2CKA002013A5331

GTIN: 4011395130025



There are terminals for each contact of the socket outlet. The terminals are for max 2 solid or rigid wires. No X-terminals. A white color LED light (230V/2,5mA/0,6VA) is integrated into the socket outlet. The light can be controlled separately or it can be connected to the socket terminals.

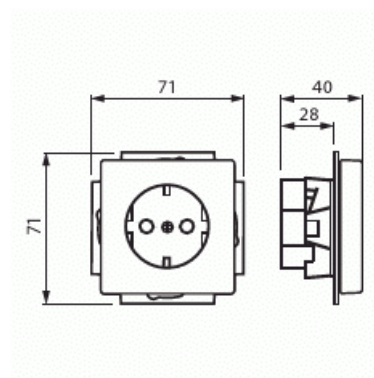

Technical specification

Electrical quantities

Nominal current:	16 A
Nominal voltage:	250 V

Classification

Suitable for degree of protection (IP):	IP20
---	------

Packing

Package:	1
Unit:	PCS

ETIM Data

© ABB 2026

Business ID 0763403-0

www.installationmaterials.com

Customer service

puh. +358 10 222 1999

contact.center@fi.abb.com

ABB Exchange

+358 10 22 11

Product Card

Socket outlet, Schuko, 1-gang, shuttered, screwless terminals, LED light, black matt



ETIM Version:	ETIM-9.0
ETIM Class:	EC000125
Number of active pins (round):	2
With signal lamp:	No
Number of units:	1
Number of phases:	1
Imprint/indication:	None
With hinged lid:	No
With enhanced contact protection:	Yes
Label space/information surface:	No
Colour:	Black
RAL-number (similar):	9005
Metallic colour:	No
Transparent:	No
Lockable:	No
Eject-mechanism:	No
Insulated mounting:	Yes
With function lighting:	No
With orientation lighting:	Yes
Over voltage protection:	No
Fault current protection:	No
With miniature fuse:	No
Special power supply:	Supplementary safety power supply (orange)
Mounting method:	Flush mounted (plaster)
Type of fastening:	Mounting with claw and screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Yes
Surface protection:	Lacquered
Surface finishing:	Matt
Anti-bacterial treatment:	No
With loop through function:	Yes
With on/off switch:	No
Rotated central insert:	No

Product Card

Socket outlet, Schuko, 1-gang, shuttered, screwless terminals, LED light, black matt



Impact strength:	IK03
Device width:	71 mm
Device height:	71 mm
Device depth:	46.5 mm
Min. depth of built-in installation box:	32 mm
Compatible with Apple HomeKit:	No
Compatible with Amazon Alexa:	No
Compatible with Google Assistant:	No
IFTTT support available:	No
With Wi-Fi signal repeater:	No
With built-in bluetooth speaker:	No