

Product Card

2-gang 1-way switch insert, 16AX/250V, 2 X-terminals, no lamp possibility



Switch insert

2-gang 1-way switch insert, 16AX/250V, 2 X-terminals, no lamp possibility



Type: 1065.20

Product ID: 2TKA000158G1

GTIN: 6418677328756



5-rocker switch insert without rockers. Rockers 1785-xx and 1785JA-xx are suitable for the insert. The switch has 2 X-terminals. The X-terminals can be used for extending other wires. No signal light possibility.

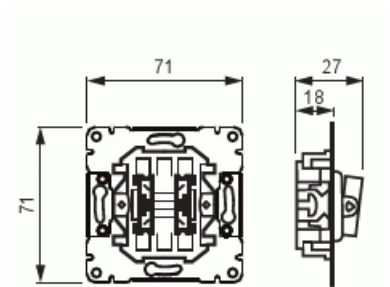

Technical specification

Electrical quantities

| | |
|----------------|-------|
| Rated current: | 16 AX |
| Rated voltage: | 250 V |

Classification

| | |
|------------------|------|
| Enclosure class: | IP20 |
|------------------|------|

Packing

| | |
|----------|--------|
| Package: | 10/100 |
| Unit: | PCS |

ETIM Data

© ABB 2024

Business ID 0763403-0

www.installationmaterials.com

Customer service

puh. +358 10 222 1999

contact.center@fi.abb.com

ABB Exchange

+358 10 22 11

Product Card

2-gang 1-way switch insert, 16AX/250V, 2 X-terminals, no lamp possibility



| | |
|--|-------------------------------------|
| Wiring system: | Series switch |
| Method of operation: | Rocker/button |
| Assembly arrangement: | Basic element with full cover plate |
| Push button switch: | No |
| Number of rockers: | 2 |
| Mounting method: | Flush mounted (plaster) |
| Type of fastening: | Mounting with claw and screw |
| With mounting plate: | No |
| Material: | Plastic |
| Material quality: | Thermoplastic |
| Halogen free: | Yes |
| Anti-bacterial treatment: | No |
| Surface protection: | Galvanized |
| Colour: | Stainless steel |
| RAL-number (similar): | 9010 |
| Label space/information surface: | No |
| Illumination: | No |
| Suitable for degree of protection (IP): | IP21 |
| Nominal voltage: | 250 V |
| Rated current: | 16 A |
| Switching current for fluorescent lamps: | 16 AX |
| Feedback-signal contact: | No |
| Connection type: | Other |
| Washing machine switch: | No |
| Device width: | 70 mm |
| Device height: | 35 mm |
| Device depth: | 85 mm |
| Built-in depth: | 18 mm |
| Min. depth of built-in installation box: | 18 mm |