

Junction box

Junction box, 73 mm

Type: AU8.73

Product ID: 2TKA003967G1

GTIN: 6438199000435












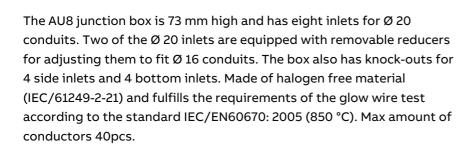

Technical specification

Packing

Package:	40
Unit:	PCS

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC002601
Mounting method:	Flush mounted (plaster)
Shape:	Round
Construction type:	Cable junction box
Model:	Single
Provided with revolving ring:	No
Connectable:	No

© ABB 2025

Business ID 0763403-0

ABB Exchange

Product Card

Junction box, 73 mm



Diameter: 94 mm Length: 135 mm Width: 135 mm Depth: 135 mm Inner depth: 69 mm For number of electric fittings: 1 Mounting switching equipment: Screwing With screws: No Housing feed-through by break-out opening: Yes Housing feed-through by seal membrane: No Housing feed-through by seal membrane: No Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Number of inlets: 8 Number of inlets: 8 Number of inlets: 8 Number of inlets: 8 Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Snapped on With screening: No With screening: No With screening: No	Equipped with:	None
Width: 135 mm Depth: 135 mm Inner depth: 69 mm For number of electric fittings: 1 Mounting switching equipment: Screwing With screws: No Housing feed-through by break-out opening: Yes Housing feed-through by seal membrane: No Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Snapped on Sealable: No With screening: No	Diameter:	94 mm
Depth: 135 mm Inner depth: 69 mm For number of electric fittings: 1 Mounting switching equipment: Screwing With screws: No Housing feed-through by break-out opening: Yes Housing feed-through by seal membrane: No Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Snapped on Sealable: No With screening: No	Length:	135 mm
Inner depth: 69 mm For number of electric fittings: 1 Mounting switching equipment: Screwing With screws: No Housing feed-through by break-out opening: Yes Housing feed-through by seal membrane: No Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Snapped on Sealable: No With screening: No	Width:	135 mm
For number of electric fittings: Mounting switching equipment: With screws: No Housing feed-through by break-out opening: Housing feed-through by seal membrane: Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of included spouts: Material: Halogen free: Surface protection: Colour: Degree of protection (IP): Transparent cover: No With screening: No With screening: No No With screening: No No No No No No No No No N	Depth:	135 mm
Mounting switching equipment: With screws: No Housing feed-through by break-out opening: Yes Housing feed-through by seal membrane: No Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Sealable: No With screening: No With screening:	Inner depth:	69 mm
With screws: Housing feed-through by break-out opening: Housing feed-through by seal membrane: No Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Sealable: No With screening: No With screening: No	For number of electric fittings:	1
Housing feed-through by break-out opening: Housing feed-through by seal membrane: No Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inlets: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Sealable: No With screening: No With screening:	Mounting switching equipment:	Screwing
Housing feed-through by seal membrane: Housing feed-through by nozzle: Yes Housing feed-through by step membrane: No For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of included spouts: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Sealable: No With screening: No	With screws:	No
Housing feed-through by nozzle: Housing feed-through by step membrane: For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: Inlet from the rear: Yes Number of included spouts: Material: Halogen free: Surface protection: Colour: Degree of protection (IP): Transparent cover: No With screening: Yes Yes No No No No No No No No No N	Housing feed-through by break-out opening:	Yes
Housing feed-through by step membrane: For tube diameter: 20/25 mm Pipe locking: Yes Pipe locking optional: No Inlet from the rear: Yes Number of inelts: 8 Number of included spouts: 8 Material: Plastic Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): IP3X Transparent cover: No Cover attachment: Sealable: With screening: No	Housing feed-through by seal membrane:	No
For tube diameter: Pipe locking: Yes Pipe locking optional: Inlet from the rear: Yes Number of inlets: Number of included spouts: Material: Halogen free: Yes Surface protection: Colour: Degree of protection (IP): Transparent cover: No Cover attachment: Sealable: With screening: No	Housing feed-through by nozzle:	Yes
Pipe locking:YesPipe locking optional:NoInlet from the rear:YesNumber of inlets:8Number of included spouts:8Material:PlasticHalogen free:YesSurface protection:UntreatedColour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Housing feed-through by step membrane:	No
Pipe locking optional: Inlet from the rear: Number of inlets: Number of included spouts: Material: Halogen free: Surface protection: Colour: White Degree of protection (IP): Transparent cover: No Cover attachment: Sealable: No With screening: No	For tube diameter:	20/25 mm
Inlet from the rear: Number of inlets: Number of included spouts: Material: Halogen free: Yes Surface protection: Untreated Colour: White Degree of protection (IP): Transparent cover: No Cover attachment: Sealable: No With screening: No	Pipe locking:	Yes
Number of inlets:8Number of included spouts:8Material:PlasticHalogen free:YesSurface protection:UntreatedColour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Pipe locking optional:	No
Number of included spouts:8Material:PlasticHalogen free:YesSurface protection:UntreatedColour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Inlet from the rear:	Yes
Material:PlasticHalogen free:YesSurface protection:UntreatedColour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Number of inlets:	8
Halogen free: Surface protection: Colour: Degree of protection (IP): Transparent cover: No Cover attachment: Sealable: No With screening: Yes Untreated Untreated No Space of Protection (IP): IP3X Transparent cover: No No No No No No No No No N	Number of included spouts:	8
Surface protection:UntreatedColour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Material:	Plastic
Colour:WhiteDegree of protection (IP):IP3XTransparent cover:NoCover attachment:Snapped onSealable:NoWith screening:No	Halogen free:	Yes
Degree of protection (IP): Transparent cover: No Cover attachment: Sealable: No With screening: No	Surface protection:	Untreated
Transparent cover: Cover attachment: Snapped on Sealable: No With screening: No	Colour:	White
Cover attachment:Snapped onSealable:NoWith screening:No	Degree of protection (IP):	IP3X
Sealable: No With screening: No	Transparent cover:	No
With screening: No	Cover attachment:	Snapped on
	Sealable:	No
Air tight: No	With screening:	No
	Air tight:	No
Clamp position fixed: No	Clamp position fixed:	No
Luminaire hook mounting: No	Luminaire hook mounting:	No
Special application: None	Special application:	None

© ABB 2025
Business ID 0763403-0
www.installationmaterials.com

Customer service puh. +358 10 222 1999 contact.center@fi.abb.com **ABB Exchange** +358 10 22 11