


Low mounting box,
branch.2-way

Low mounting box, height 38 mm,
branched 2-way

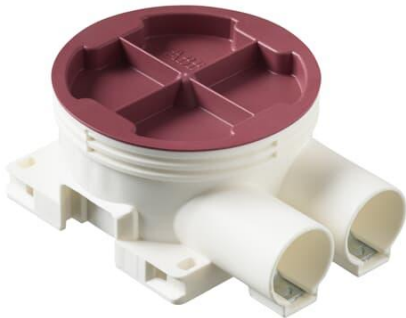

Type: AU6.2

Product ID: 2TKA130032G1

GTIN: 6410011523155



The box has 2 branch inlets with locking devices for D20 conduits. A separate inlet can be attached to the side opposite the fixed inlets. The bottom of the box has two inlets. Inlets cannot be attached to the sides of the box, but the sides can be used to connect boxes with each other using a PMR474 interconnector cut level with the bottom of the box. The height of the box is 38 mm. Made of halogen free material (IEC/61249-2-21) and fulfills the requirements of the glow wire test according to the standard IEC/EN60670: 2005 (850 °C).

Technical specification

Dimensions

| | |
|-------------------|----------|
| For plastic pipe: | Ø16/20mm |
|-------------------|----------|

Packing

| | |
|----------|-----|
| Package: | 100 |
| Unit: | PCS |

ETIM Data

| | |
|---------------|----------|
| ETIM Version: | ETIM-9.0 |
|---------------|----------|

Product Card

Low mounting box, height 38 mm, branched 2-way



| | |
|--|--------------------------------------|
| ETIM Class: | EC002601 |
| Mounting method: | Flush mounted (plaster) |
| Shape: | Round |
| Construction type: | Device connection box (round/square) |
| Model: | Single |
| Provided with revolving ring: | No |
| Connectable: | Yes |
| Equipped with: | None |
| Diameter: | 71 mm |
| Length: | 71 mm |
| Width: | 71 mm |
| Depth: | 71 mm |
| Inner depth: | 36 mm |
| For number of electric fittings: | 1 |
| Mounting switching equipment: | Screwing |
| With screws: | Yes |
| Housing feed-through by break-out opening: | Yes |
| Housing feed-through by seal membrane: | No |
| Housing feed-through by nozzle: | Yes |
| Housing feed-through by step membrane: | No |
| For tube diameter: | 20/25 mm |
| Pipe locking: | Yes |
| Pipe locking optional: | No |
| Inlet from the rear: | Yes |
| Number of inlets: | 2 |
| Number of included spouts: | 2 |
| Material: | Plastic |
| Halogen free: | Yes |
| Surface protection: | Untreated |
| Colour: | White |
| Degree of protection (IP): | IP44 |
| Transparent cover: | No |
| Cover attachment: | Snapped on |
| Sealable: | No |

Product Card

Low mounting box, height 38 mm, branched 2-way



| | |
|--------------------------|------|
| With screening: | No |
| Air tight: | No |
| Clamp position fixed: | No |
| Luminaire hook mounting: | No |
| Special application: | None |