

# Socket outlet


Single socket outlet with residual current device

**Typ:** 3120EUC-916

**Produkt ID:** 2CCG001361R0001

**GTIN:** 7612271518301

Shuttered. DP cut off (P,N) Without PE monitoring. With connecting conductor and protection of downstream socket outlets. Rated actuating current: 30 mA. Release time:  $\leq 30$  ms. Short-circuit strength: 3000 A (with 25 A GL fuse). Current surge strength: 250 A (8/20)  $\mu$ s. With fixing claws. Rated frequency: 45-60 Hz.

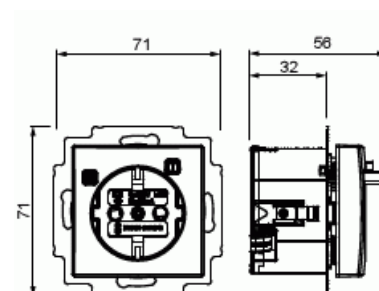

## Teknisk specifikation

### Elektriska värden

Nominal current:	16 A
Nominal voltage:	250 V

### Klassificering

Suitable for degree of protection (IP):	IP21
---	------

### Packning

Förpackning:	1/1
Enhet:	st

### ETIM Data

ETIM Version:	ETIM-9.0
---------------	----------

ETIM Class:	EC000125
Number of active pins (round):	2
With signal lamp:	Nej
Number of units:	1
Number of phases:	1
Imprint/indication:	None
Connection type:	Push-in clamp
With hinged lid:	Nej
With enhanced contact protection:	Nej
Label space/information surface:	Nej
Colour:	White
RAL-number (similar):	9003
Metallic colour:	Nej
Transparent:	Nej
Lockable:	Nej
Eject-mechanism:	Nej
Insulated mounting:	Nej
With function lighting:	Nej
With orientation lighting:	Nej
Over voltage protection:	Nej
Fault current protection:	Nej
With miniature fuse:	Nej
Special power supply:	No special power supply
Mounting method:	Flush mounted (plaster)
Type of fastening:	Mounting with claw and screw
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Ja
Surface protection:	Untreated
Surface finishing:	Glossy
Anti-bacterial treatment:	Nej
With loop through function:	Nej
With on/off switch:	Nej
Rotated central insert:	Nej
Frequency:	50...60 Hz

Rated fault current:	30 mA
Device width:	71 mm
Device height:	71 mm
Device depth:	56 mm