


Watchdog

Watchdog receiver, RF, 230V, 10AX

Typ: 6701-101-500

Produkt ID: 2CKA006700A0040

GTIN: 4011395182642

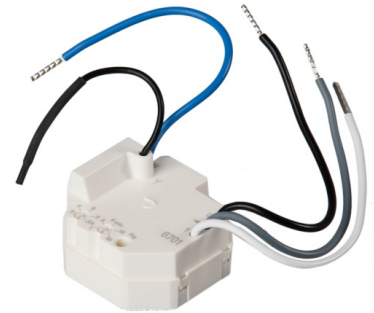

230 V, 16 A relay, IP55, for surface mounting. Detection area 220 degrees - the sensor section can be tilted down and rotated horizontally. Detection range 16 m to the front and sides when mounted at a height of 2.5 m. Adjustable lighting level 0.5-1,000 lux, switch-off delay 2 sec-30 min.

Teknisk specifikation

Elektriska värden

Nominal voltage:	230 V
Power ratio (cos φ):	0.6
Switching current:	≤ 10 AX

Klassificering

Enclosure class:	IP20
------------------	------

Dimensions

Dimensions:	30x47x48 mm
Weight:	48 g

Thermal conditions

Operating temperature:	-5 ... 40 °C
------------------------	--------------

Colors

Colour:	White
---------	-------

Electronics

Operating frequency:	868 MHz
Switching time:	60 sek - 30 min

Packning

Förpackning:	1/10
Enhet:	st

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC001588
Type of load:	Universal and LED Retrofit
Mounting method:	Flush mounted (plaster)
Material:	Plastic
Material quality:	Thermoplastic
Surface protection:	Other
Surface finishing:	Matt
Colour:	Other
Transparent:	Nej
Frequency:	868 Hz
Rated current:	10 A
Type of fastening:	Clamp mounting
Min. depth of built-in installation box:	25 mm
Compatible with Apple HomeKit:	Nej
Compatible with Google Assistant:	Nej
Compatible with Amazon Alexa:	Nej
IFTTT support available:	Nej