


BasicLINE standard

BasicLINE standard, white

Typ: 6814U

Produkt ID: 2CKA006800A2518

GTIN: 4011395148044

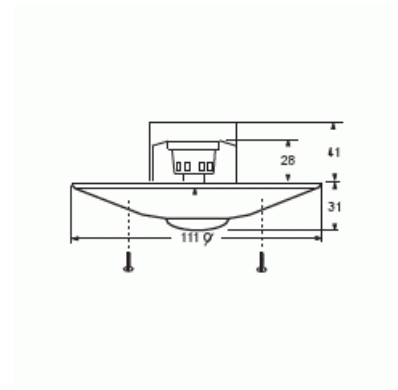

Teknisk specifikation

Klassificering

| | |
|------------------|------|
| Enclosure class: | IP40 |
|------------------|------|

Dimensions

| | |
|-------------|---------------|
| Dimensions: | 111x111x59 mm |
|-------------|---------------|

Thermal conditions

| | |
|------------------------|-------------|
| Operating temperature: | 0 ... 45 °C |
|------------------------|-------------|

Electronics

| | |
|-----------------|------|
| Detection area: | 360° |
|-----------------|------|

Packning

| | |
|--------------|------|
| Förpackning: | 1/24 |
| Enhet: | st |

ETIM Data

| | |
|---|-------------------------|
| ETIM Version: | ETIM-9.0 |
| ETIM Class: | EC000133 |
| Model: | Presence detector |
| Sensor type: | Passive infrared |
| With DALI interface: | Nej |
| Constant light control: | Nej |
| HVAC-control: | Nej |
| Forced switch on: | Nej |
| Forced switch off: | Nej |
| Animal zone: | Nej |
| Creep-under protection: | Ja |
| Networkable: | Nej |
| Optimum mounting height: | 2 m |
| Staircase monitoring: | Ja |
| Bridging switch: | Nej |
| Suitable for wireless transmission: | Nej |
| Remote operation: | Nej |
| With remote control: | Nej |
| Response value sensitivity adjustable: | Nej |
| Response value luminosity adjustable: | Ja |
| With signal unit: | Nej |
| Teach-function for response value luminosity: | Nej |
| Dim function with dimmer basic element: | Nej |
| Mounting method: | Flush mounted (plaster) |
| Suitable for ceiling mounting: | Ja |
| Suitable for wall mounting: | Nej |
| Material: | Plastic |
| Material quality: | Thermoplastic |
| Halogen free: | Ja |

| | |
|--|--------------|
| Surface protection: | Untreated |
| Surface finishing: | Matt |
| Anti-bacterial treatment: | Nej |
| Colour: | White |
| RAL-number (similar): | 9010 |
| Transparent: | Nej |
| Degree of protection (IP): | IP40 |
| Voltage type: | AC |
| Frequency: | 50...60 Hz |
| Nominal voltage: | 230 V |
| Min. switch-on time: | 5 s |
| Max. duty cycle: | 30 min |
| Detection angle horizontal: | 30...360 ° |
| Response value luminosity: | 10...2000 lx |
| Substation input: | Ja |
| With alarm function: | Nej |
| Width: | 135 mm |
| Height: | 30 mm |
| Depth: | 25 mm |
| Built-in depth: | 41 mm |
| Built-in diameter: | 65 mm |
| Min. depth of built-in installation box: | 41 mm |
| Compatible with Apple HomeKit: | Nej |
| Compatible with Google Assistant: | Nej |
| Compatible with Amazon Alexa: | Nej |
| IFTTT support available: | Nej |