


BasicLINE hallway

BasicLINE hallway, white

Typ: 6818U-500

Produkt ID: 2CKA006800A2519

GTIN: 4011395148051

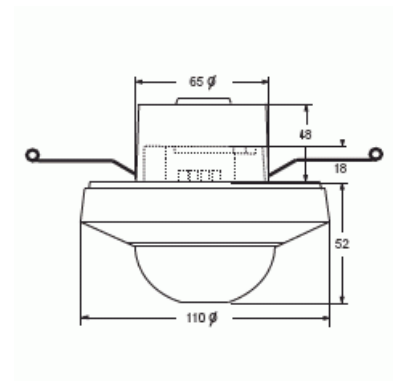

Teknisk specifikation

Elektriska värden

Rated frequency: 50 Hz

Klassificering

Enclosure class: IP40

Dimensions

Dimensions: 110x110x70 mm

Electronics

Detection area: 360 °

Packning

Förpackning:	1/18
Enhet:	st

ETIM Data

ETIM Version:	ETIM-9.0
ETIM Class:	EC000133
Model:	Presence detector
Sensor type:	Passive infrared
With DALI interface:	Nej
Constant light control:	Nej
HVAC-control:	Nej
Forced switch on:	Ja
Forced switch off:	Ja
Animal zone:	Nej
Creep-under protection:	Ja
Networkable:	Nej
Optimum mounting height:	2 m
Staircase monitoring:	Ja
Bridging switch:	Nej
Suitable for wireless transmission:	Nej
Remote operation:	Ja
With remote control:	Nej
Response value sensitivity adjustable:	Nej
Response value luminosity adjustable:	Ja
With signal unit:	Nej
Teach-function for response value luminosity:	Nej
Dim function with dimmer basic element:	Nej
Mounting method:	Flush mounted (plaster)
Suitable for ceiling mounting:	Ja
Suitable for wall mounting:	Nej
Material:	Plastic
Material quality:	Thermoplastic
Halogen free:	Ja

Surface protection:	Untreated
Surface finishing:	Matt
Anti-bacterial treatment:	Nej
Colour:	White
RAL-number (similar):	9010
Transparent:	Nej
Degree of protection (IP):	IP40
Voltage type:	AC
Frequency:	50...60 Hz
Nominal voltage:	230 V
Min. switch-on time:	10 s
Max. duty cycle:	30 min
Detection angle horizontal:	30...360 °
Response value luminosity:	10...2000 lx
Substation input:	Ja
With alarm function:	Nej
Width:	110 mm
Height:	110 mm
Depth:	100 mm
Built-in depth:	48 mm
Built-in diameter:	65 mm
Min. depth of built-in installation box:	48 mm
Compatible with Apple HomeKit:	Nej
Compatible with Google Assistant:	Nej
Compatible with Amazon Alexa:	Nej
IFTTT support available:	Nej