

# Socket outlet unit


Socket outlet unit 16 A

**Typ:** AUD12DSO

**Produkt ID:** 2TKA00005706

**GTIN:** 6438199023120

Socket outlet with terminals for each contact of the socket outlet for max 4 rigid wires. The socket outlet insert without the cover plate is screen-protected.

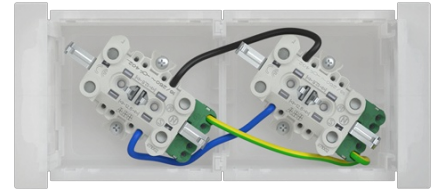

## Teknisk specifikation

### Elektriska värden

|                  |       |
|------------------|-------|
| Nominal current: | 16 A  |
| Nominal voltage: | 250 V |

### Klassificering

|                                         |      |
|-----------------------------------------|------|
| Suitable for degree of protection (IP): | IP20 |
|-----------------------------------------|------|

### ETIM Data

|                                      |               |
|--------------------------------------|---------------|
| ETIM Version:                        | ETIM-9.0      |
| ETIM Class:                          | EC000125      |
| Number of active pins (round):       | 2             |
| With signal lamp:                    | Nej           |
| Number of socket outlets switchable: | 1             |
| Number of phases:                    | 1             |
| Imprint/indication:                  | None          |
| Connection type:                     | Push-in clamp |
| With hinged lid:                     | Nej           |
| With enhanced contact protection:    | Nej           |

|                                   |                            |
|-----------------------------------|----------------------------|
| Label space/information surface:  | Nej                        |
| Colour:                           | White                      |
| RAL-number (similar):             | 9010                       |
| Metallic colour:                  | Nej                        |
| Transparent:                      | Nej                        |
| Lockable:                         | Nej                        |
| Eject-mechanism:                  | Nej                        |
| Insulated mounting:               | Nej                        |
| With function lighting:           | Nej                        |
| With orientation lighting:        | Nej                        |
| Over voltage protection:          | Nej                        |
| Fault current protection:         | Nej                        |
| With miniature fuse:              | Nej                        |
| Special power supply:             | No special power supply    |
| Mounting method:                  | Wall duct                  |
| Type of fastening:                | Snap mounting (engagement) |
| Material:                         | Plastic                    |
| Material quality:                 | Thermoplastic              |
| Halogen free:                     | Nej                        |
| Surface protection:               | Untreated                  |
| Surface finishing:                | Matt                       |
| Anti-bacterial treatment:         | Nej                        |
| With loop through function:       | Nej                        |
| With on/off switch:               | Nej                        |
| Rotated central insert:           | Nej                        |
| Frequency:                        | 50 Hz                      |
| Device width:                     | 47 mm                      |
| Device height:                    | 193 mm                     |
| Device depth:                     | 85 mm                      |
| Compatible with Apple HomeKit:    | Nej                        |
| Compatible with Amazon Alexa:     | Nej                        |
| Compatible with Google Assistant: | Nej                        |
| IFTTT support available:          | Nej                        |
| With Wi-Fi signal repeater:       | Nej                        |
| With built-in bluetooth speaker:  | Nej                        |

